

### Specifications

Models	GS-2032		GS-2632		GS-3232	
Measurements	Metric	US	Metric	US	Metric	US
Working height maximum*	7.90 m	25 ft 11 in	9.80 m	32 ft 1 in	11.50 m	37 ft 8 in
<b>A</b> Platform height maximum w/load sense	5.90 m	19 ft 5 in	7.80 m	25 ft 6 in	9.50 m	31 ft 4 in
<b>B</b> Platform height stowed	1.03 m	3 ft 4.5 in	1.16 m	3 ft 9.5 in	1.29 m	4 ft 2.75 in
<b>C</b> Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft
<b>D</b> Platform width - outside	81 cm	2 ft 8 in	81 cm	2 ft 8 in	81 cm	2 ft 8 in
Guardrail height	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in
<b>A</b> Height - stowed: bolted rails	2.13 m	7 ft	2.26 m	7 ft 5 in	2.39 m	7 ft 10 in
rails folded	1.78 m	5 ft 9 in	1.91 m	6 ft 3 in	2.03 m	6 ft 8 in
Length - stowed	2.44 m	8 ft	2.44 m	8 ft	2.44 m	8 ft
<b>F</b> Length - extended	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in
<b>G</b> Width	81 cm	2 ft 8 in	81 cm	2 ft 8 in	81 cm	2 ft 8 in
<b>H</b> Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
<b>A</b> Ground clearance - center	9.5 cm	3.76 in	9.5 cm	3.76 in	9.5 cm	3.76 in
<b>A</b> - with pothole guards deployed	2 cm	0.75 in	2 cm	0.75 in	2 cm	0.75 in

### Productivity

Maximum platform occupancy (in/out) <sup>1</sup>	2/1	2/1	2/-	2/-	2/-	2/-
Lift capacity	363 kg	800 lbs	227 kg	500 lbs	227 kg	500 lbs
Drive height	full height		full height		6.71 m	22 ft
Drive speed - stowed	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed**	30%		25%		25%	
Max outrigger levelling: front to back	_____	_____	_____	_____	3°	
Max outrigger levelling: side to side	_____	_____	_____	_____	5°	
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	2.13 m	7 ft	2.13 m	7 ft	2.13 m	7 ft
Raise / lower speed	30 / 34 sec	30 / 34 sec	30 / 40 sec	30 / 40 sec	57 / 40 sec	57 / 40 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

### Power

Power source	24 V DC (four 6V 225 Ah batteries)	24 V DC (four 6V 225 Ah batteries)	24 V DC (four 6V 225 Ah batteries)
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L
			3.75 gal

### Sound & Vibration Levels


Sound pressure level (ground workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Vibration	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>

### Weight\*\*\*

	1,825 kg	4,024 lbs	1,956 kg	4,313 lbs	2,352 kg	5,185 lbs
--	----------	-----------	----------	-----------	----------	-----------

### Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2013); 2004/108/EC (EMC); 2006/95/EC (LVD)

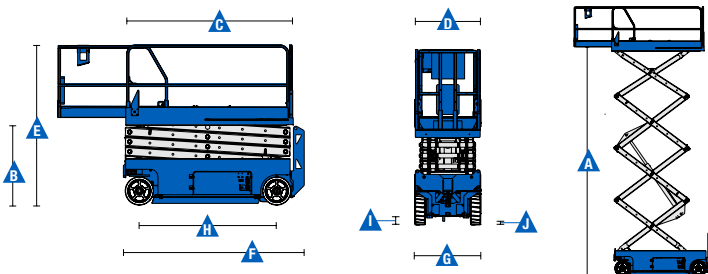

<sup>1</sup> Indoor use only for the GS-2632 and GS-3232  
<sup>\*</sup> The metric equivalent of working height adds 2 m to platform height.  
<sup>\*\*</sup> Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
<sup>\*\*\*</sup> Weight will vary depending on options and/or country standards.

### Features

#### Standard Features

##### Measurements

###### GS-2032

- 7.90 m (25 ft 11 in) working height
- Up to 363 kg (800 lbs) lift capacity

###### GS-2632

- 9.80 m (32 ft 1 in) working height
- Up to 227 kg (500 lbs) lift capacity

###### GS-3232

- 11.50 m (37 ft 8 in) working height
- Up to 227 kg (500 lbs) lift capacity

##### Productivity

- Bolted rails with half-height swing gate
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing beacons
- Electronic horn
- Hour meter
- Certified load sensor
- Telematics-Ready Connector

##### Power

- 24 V DC battery pack
- Universal 20 amp smart charger

#### Easily Configured To Meet Your Needs

##### Platform

- 2.26 x 0.81 m (7 ft 5 in x 2 ft 8 in) steel platform
- 0.91 m (3 ft) extension deck

##### Power

- 24 V DC (four 6 V 225 Ah batteries)

##### Outriggers

- Automatic levelling outriggers (on GS-3232 only, standard)
- No outriggers

##### Drive

- Dual front wheel drive

##### Tyres

- Solid non-marking


#### Options & Accessories

##### Productivity Options

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Biodegradable hydraulic oil<sup>(2)</sup>
- Track & Trace<sup>(1)</sup> (GPS unit providing machine location & operating information)
- Motion alarm package
- Automotive horn

##### Power Options

- Maintenance-free batteries
- Low temperature cut-out module<sup>(3)</sup>

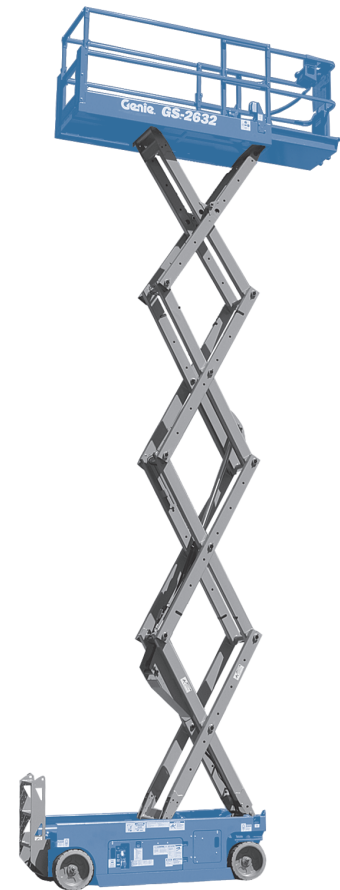

VERKOOP • VERHUUR • TWEDEHANDS • SERVICES

**EUROTRADING MORTIER**

Torhoutbaan 181 - 8480 ICHTEGEM  
Tel. 050 21 73 60 - Fax 050 21 61 33

[www.eurotradingmortier.be](http://www.eurotradingmortier.be)

<sup>(1)</sup> Includes a first 2 years subscription

<sup>(2)</sup> Available on selected models only. See your Genie representative for further information.

<sup>(3)</sup> For outdoor models only - not necessary for indoor models.

### United Kingdom

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email [AWP-InfoEurope@terex.com](mailto:AWP-InfoEurope@terex.com)  
Visit [www.genielift.co.uk/locations](http://www.genielift.co.uk/locations) to view our global locations list.

### Worldwide Manufacturing And Distribution

Australia • Brazil • Caribbean • Central America • China • France • Germany • Italy • Japan • Korea • Mexico • Russia • Southeast Asia • Spain • Sweden • United Arab Emirates • United Kingdom • United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2015 Terex Corporation.

