


Specifications

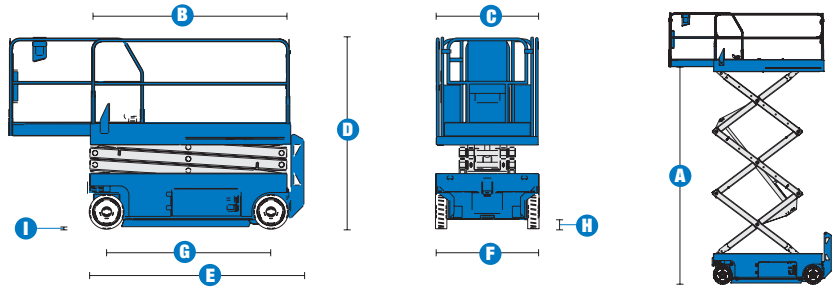

MODELS	GS™-2046		GS™-2646		GS™-3246	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height maximum*	26 ft	8.10 m	32 ft	9.92 m	38 ft	11.75
A Platform height maximum	20 ft	6.10 m	26 ft	7.92 m	32 ft	9.75 m
B Platform length - outside	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m
Slide-out platform extension deck	3 ft	.91 m	3 ft	.91 m	3 ft	.91 m
C Platform width - outside	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m
Guardrail height			3 ft 7 in	1.09 m	3 ft 7 in	1.09 m
Toeboard height	6 in	.15 m	6 in	.15 m	6 in	.15 m
D Height - stowed: folding guardrails	7 ft	2.13 m	7 ft 5 in	2.26 m	7 ft 10 in	2.39 m
rails folded	5 ft 1 in	1.55 m	5 ft 6 in	1.68 m	5 ft 11 in	1.80 m
E Length - stowed	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m
extended	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m
F Width	3 ft 10	1.17 m	3 ft 10	1.17 m	3 ft 10	1.17 m
G Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
H Ground clearance - center	4 in	.10 m	4 in	.10 m	4 in	.10 m
I - with pothole guards deployed	.75 in	.019 m	.75 in	.019 m	.75 in	.019 m

PRODUCTIVITY						
Lift capacity	1,200 lbs	544 kg	1,000 lbs	454 kg	700 lbs	318 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability - stowed**	30%		30%		25%	
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m
Raise / lower speed	30 / 28 sec	30 / 28 sec	30 / 24 sec	30 / 24 sec	57 / 40 sec	57 / 40 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	6.5 gal	24.6 L	6.5 gal	24.6 L	7.0 gal	26.5 L

WEIGHT***						
ANSI/CSA	3,977 lbs	1,804 kg	4,312 lbs	1,956 kg	5,211 lbs	2,364 kg
CE/AUS	4,351 lbs	1,974 kg	5,395 lbs	2,447 kg	6,200 lbs	2,812 kg

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10, PB-10-611-03

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2046

- 26 ft (8.10 m) working height
- Up to 1,200 lb (545 kg) lift capacity

GS™-2646

- 32 ft (9.92 m) working height
- Up to 1,000 lb (454 kg) lift capacity

GS™-3246

- 38 ft (11.75 m) working height
- Up to 700 lb (318 kg) lift capacity

PRODUCTIVITY

- Steel 7 ft 5 in (2.26 m) platform
- 3 ft (.91 m) platform extension deck
- Folding rails with full height swing gate
- 2WD
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Multiple disc brakes
- Brake release
- Drive speed interlock
- Swing-out component tray
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter

POWER

- 24V DC system (four 6V 225 Ah batteries)

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Pipe cradle for square guardrails
- Dual flashing beacons
- Motion alarm
- Platform work lights
- Ground controls cover
- Automotive horn

POWER

- Power inverter
- Maintenance-free batteries
- EE rating

PLATFORM OPTIONS


POWER

- 24V (four 6V 225 Ah batteries)

DRIVE

TIRE

- Solid non-marking tires

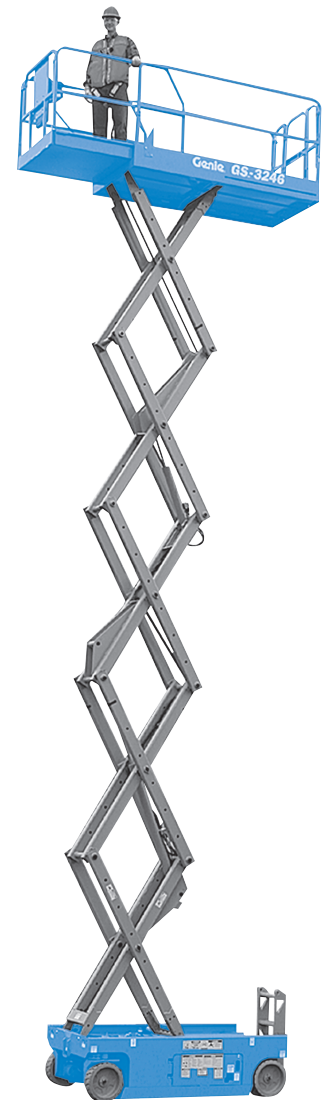

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: infoeurope@genieind.com

Distributed By:

Dk Rental nv - Expresweg 30
B-8790 Waregem - Belgium

Tel: +32 56 622622 - Fax: +32 56 611622

Email: verhuur@dkrental.be - Web: www.dkrental.be